

数量計算書

数量総括表

工 種	種 別	細 別	規 格	単位	数 量	摘要
土 工						
	掘 削 工	掘削		m ³	2	
		床掘	土砂(防火水槽)	m ³	185	
			土砂(歩道部)	m ³	3	
	盛 土 工	埋戻し	発生土(防火水槽)	m ³	116	
			発生土(歩道部)	m ³	3	
	基面整正			m ²	26	
	残 土 処 理 工	敷均し締固め		m ³	62	
舗 装 工						
	As 舗 装 工	歩道舗装工(透水性舗装)				
		フィルター層	良質砂t=5cm	m ²	11	
		路盤工	再生クラッシャーRC-40 t=15cm	m ²	11	
		表層工	透水性As混合物 t=4cm	m ²	11	
	民 地 舗 装 工	路盤工	RC-40 t=10cm	m ²	80	
		防草シート		m ²	80	
排水構造物工						
	側 溝 工	千葉県型側溝CH-25	300×500×2000	m	8.0	
		千葉県型側溝Co蓋	CHL-25 300用	枚	16	
		L型側溝(摺付部)	L=0.6m	m	1.2	
		L型側溝(切下部)	L=0.6m	m	6.0	
構造物撤去工	舗 装 取 壊 し 工	As舗装切断	歩道部 t=4cm	m	2.6	
		As舗装取壊	歩道部 t=4cm	m ²	10.5	
		路盤掘削	歩道部 t=10cm	m ³	1.1	
	運 搬 処 分 工	As 舗 装 殻 運 搬		m ³	0.4	
		As 舗 装 殻 処 分		t	0.9	
		路 盤 材 運 搬		m ³	1.1	
		路 盤 材 処 分		t	2.3	
		有 筋 2 次 Co 取 壊 し		m ³	2.4	
		有 筋 2 次 C o 運 搬		m ³	2.4	
		有 筋 2 次 C o 処 分		t	5.7	

土 工 集 計 表


[illegible]

土 工 調 書

[illegible]

防火水槽設置 土工単位数量計算書


1式当り

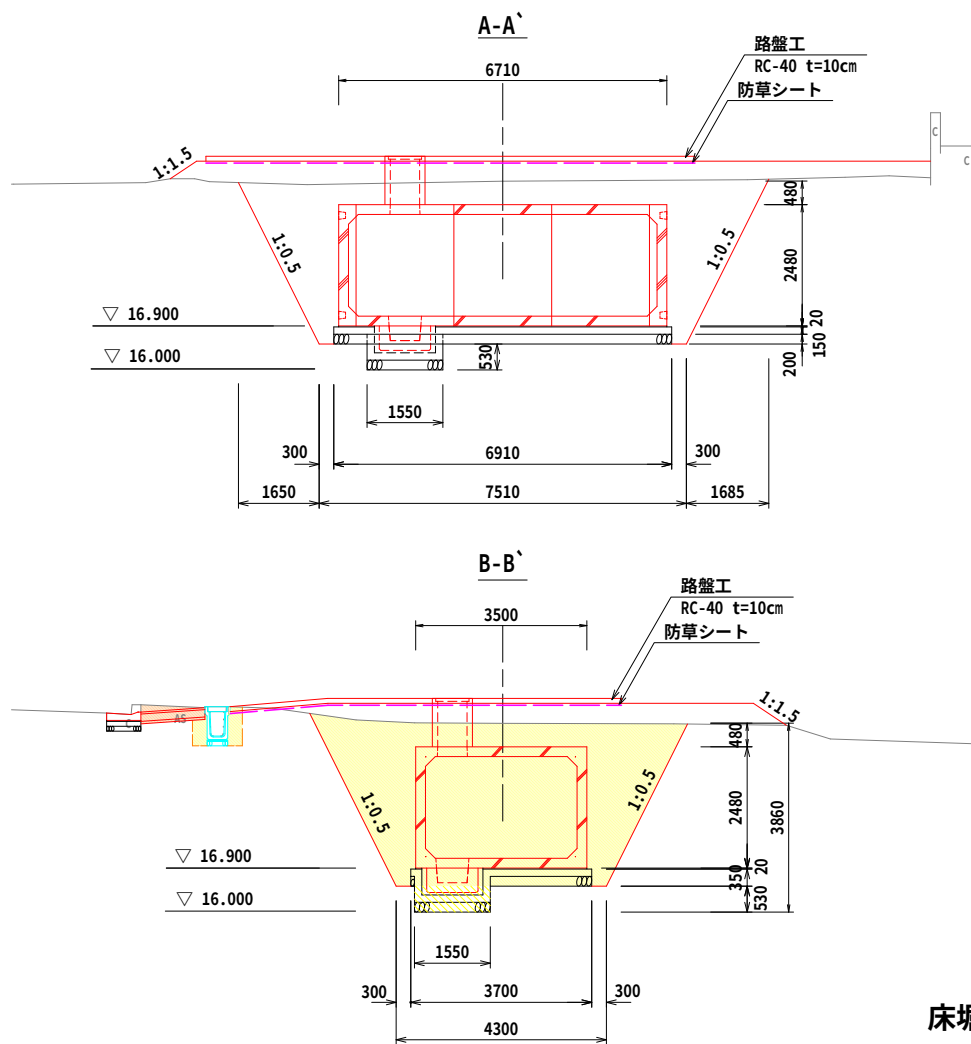

種 別	規格・寸法	計 算 式	数 量
防火水槽体積			
吸管投入口		$0.82^2 \times 3.14 / 4 \times 0.48$	0.3 m ³
水槽		$6.71 \times 3.5 \times 2.5$	58.7 m ³
吸管底部		$1.55^2 \times 3.14 / 4 \times 0.53$	1.0 m ³
基礎		$6.91 \times 3.7 \times 0.35$	8.9 m ³
		計	68.9 m ³
床掘	B-B'断面より	$(0+20.0)/2 \times 1.65 + 20.0 \times 7.51 + (0+20.0)/2 \times 1.685$	183.6 m ³
吸管底部		$1.55^2 \times 3.14 / 4 \times 0.53$	1.0 m ³
		計	184.6 m ³
埋戻し		$184.6 - 68.9$	115.7 m ³
残土		68.9×0.9	62.0 m ³
基面整正		6.91×3.7	25.6 m ²

歩道設置 土工単位数量計算書

1箇所当り



掘削	0.2	m ²
床掘	0.4	m ²
埋戻し	0.4	m ²

步道舗装延長 L= 8.0 m

[illegible]

Site plan of the proposed parking lot. The plan shows a green hatched area representing the parking lot, with a red rectangle indicating the 150.2m² paved area. The plan includes dimensions for the paved area (19.77m x 18.85m) and the overall site (20.04m x 20.58m). It also shows the location of the parking lot relative to the main road (L500) and the existing building (G). The plan includes a north arrow and a scale bar.


残土量 62.0 m³
敷地面積 150.2 m²

[illegible]


防火水槽材料計算書

1基当り

断面図

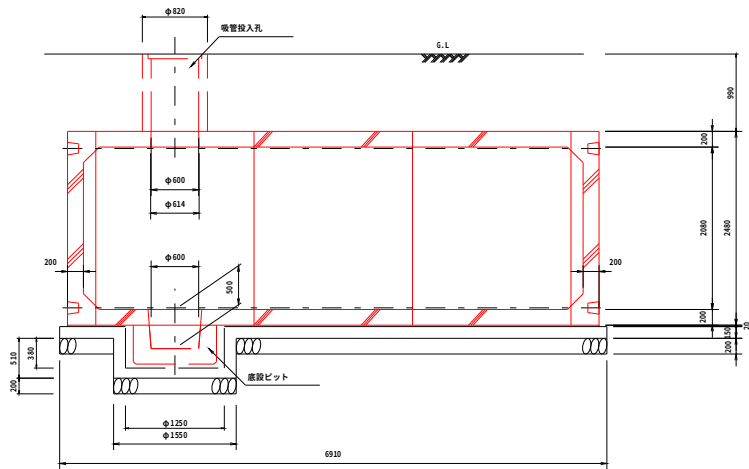

平面図

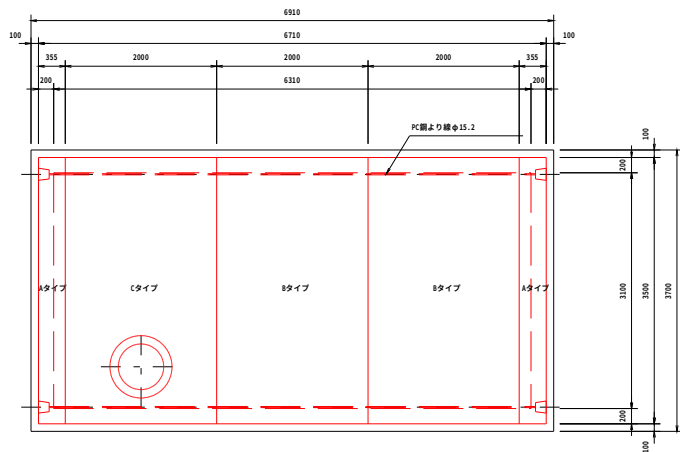


種 別	規格・寸法	計 算 式	数 量
耐震性防火水槽			1 本
鋳鉄蓋	φ600		1 枚
標識			1 箇所
モルタル		$3.5 \times 6.71 \times 0.02 - 1.25^2 \times 3.14 / 4 \times 0.02$	0.45 m ³
基礎Co		$(6.91 \times 3.7 \times 0.15 - 1.25^2 \times 3.14 / 4 \times 0.15) + (1.55^2 \times 3.14 / 4 \times 0.51 - 1.25^2 \times 3.14 / 4 \times 0.38)$	4.15 m ³
型枠		$6.91 \times 3.7 + 1.55 \times 3.14 \times 0.51$	28.05 m ³
基礎碎石	RC-40	6.91×3.7	25.57 m ²
		$6.91 \times 3.7 \times 0.2$	5.11 m ³

舖 裝 工 集 計 書

[illegible]


舖 裝 工 調 書

[illegible]

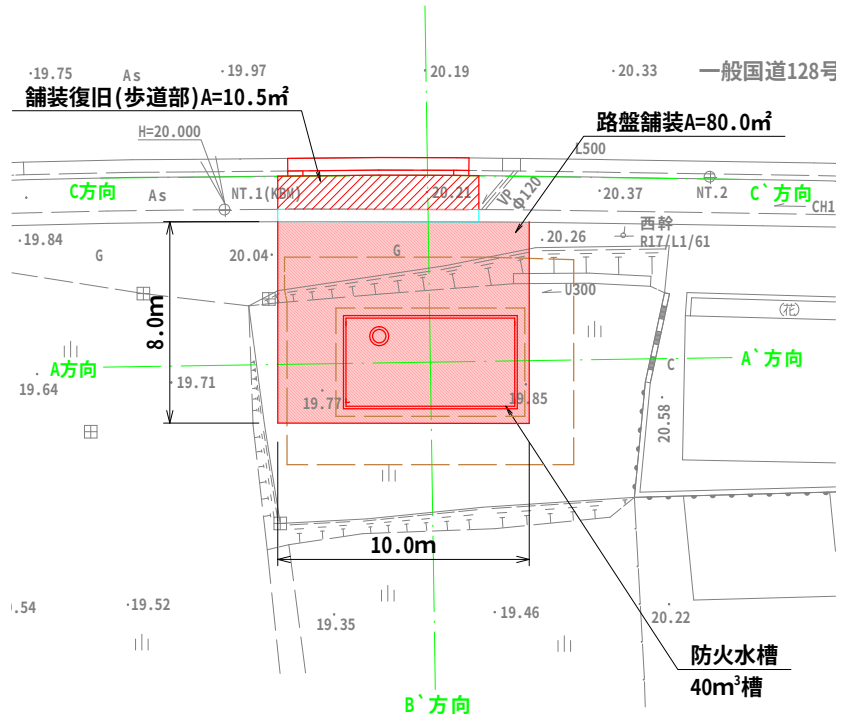


[illegible]


10m当り

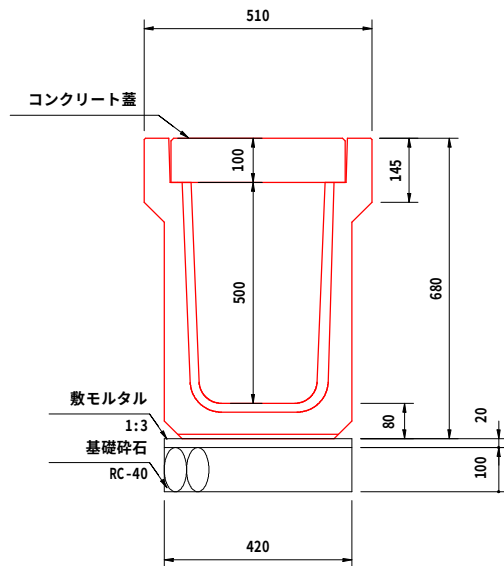


正面図




平面図

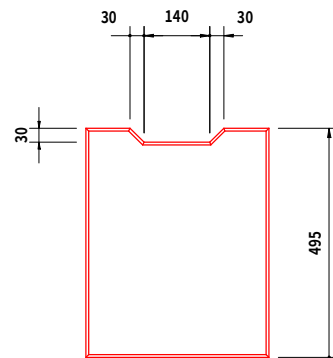[illegible]

10m当り

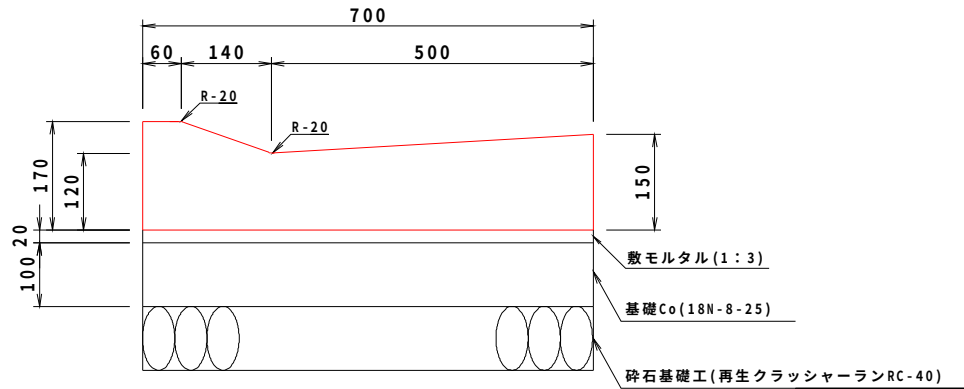[illegible]

10m当り

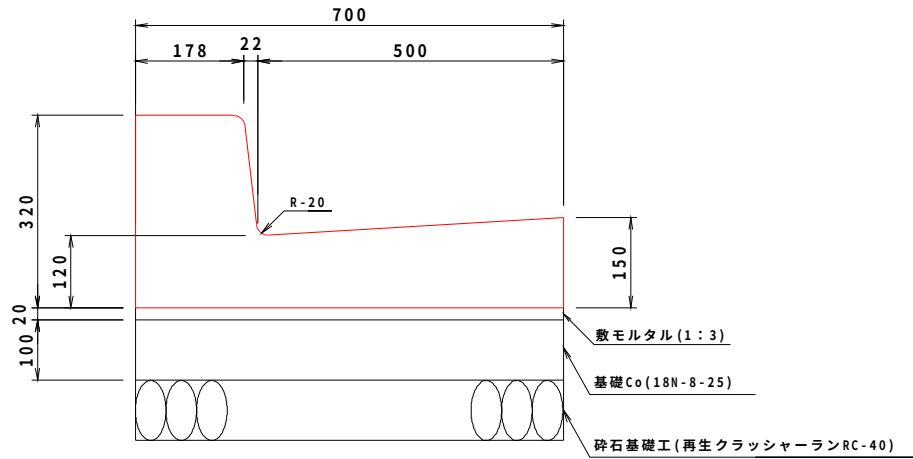[illegible]

撤 去 工 集 計 書

工 種	種 別	規格・寸法	単位	数 量	摘要
舗装取壊し工					
	As舗装切断	歩道部 t=4cm	m	2.6	
	As舗装取壊	歩道部 t=4cm	m ²	10.5	
	路盤掘削	歩道部 t=10cm	m ³	1.1	
排水構造物撤去工	U字溝撤去	U300	m	5.5	
	Co蓋撤去	U300用	枚	7.0	
	千葉県型側溝撤去	CH1-300x500	m	8.0	
	Co蓋撤去	U300用	枚	16.0	
	L型側溝撤去	L=0.6	m	7.2	
運 搬 処 分 工	As舗装殻運搬		m ³	0.4	
	As舗装殻処分		t	0.9	
	路盤材運搬		m ³	1.1	
	路盤材処分		t	2.3	
	有筋2次Co取壊し		m ³	2.4	
	有筋2次C o運搬		m ³	2.4	
	有筋2次C o処分		t	5.7	


[illegible][illegible]

撤 去 工 計 算 書 (コンクリート)

名 称	単位体積	単位重量	単位	数 量	運 搬 (m ³)				廃 材 処 分 (t)			
					コンクリート2次製品		コンクリート		コンクリート2次製品		コンクリート	
					無筋	有筋	無筋	有筋	無筋	有筋	無筋	有筋
U字溝(300)撤去	0.056 m ³ /m	0.132 t /m	m	5.5		0.3				0.7		
Co蓋撤去	0.014 m ³ /枚	0.032 t /枚	枚	7.0		0.1				0.2		
千葉県型側溝 (300×500)撤去	0.105 m ³ /m	0.246 t /m	m	8.0		0.8				2.0		
Co蓋撤去	0.016 m ³ /枚	0.037 t /枚	枚	16.0		0.3				0.6		
L型側溝撤去 一般部	0.125 m ³ /m	0.312 t /m	m	7.2		0.9				2.2		
小計					0.0	2.4	0.0	0.0	0.0	5.7	0.0	0.0


撤去工調書

[illegible]

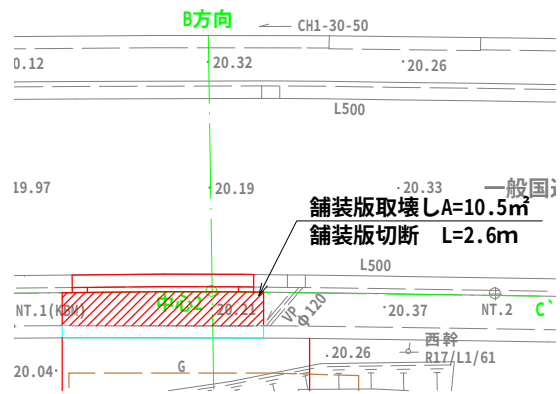

U-300撤去 単位数量計算書

1m、1枚当り

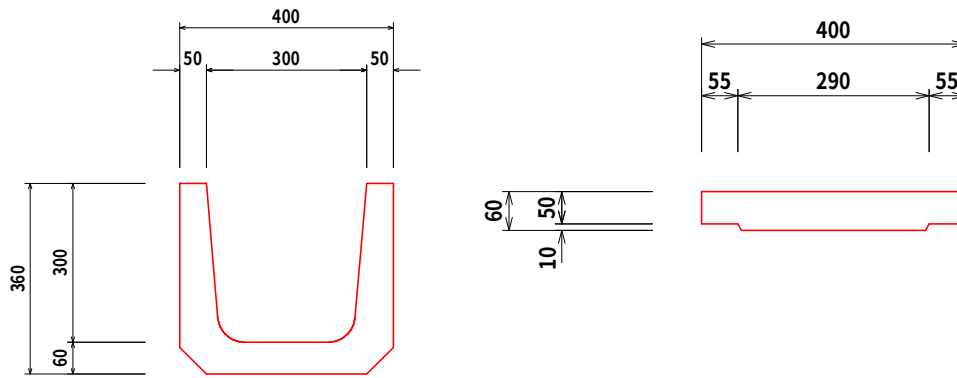

U字溝 0.6 m/本
79 kg/本



コンクリート蓋 0.6 m/枚
32 kg/枚

種 別	規格・寸法	計 算 式	数 量
側溝撤去	300×300		
取壊し		0.132/2.5	0.056 m ³ /m
処分	有筋Co	79/1000*(1/0.6)	0.132 t/m
コンクリート蓋撤去	U300用,L=600		
取壊し		0.032/2.5	0.014 m ³ /枚
処分	有筋Co		0.032 t/枚


CH-1(300×500)撤去 単位数量計算書

1m、1枚当り

正面図

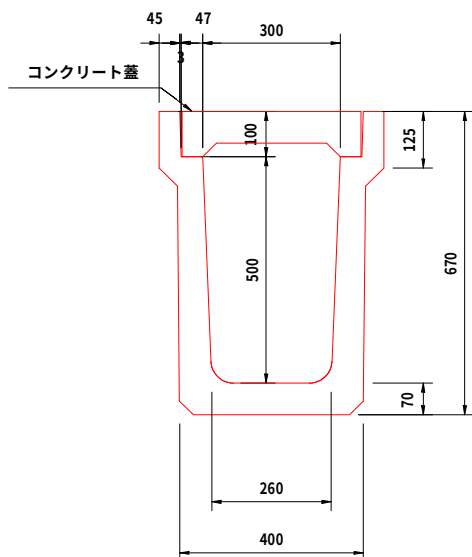

平面図

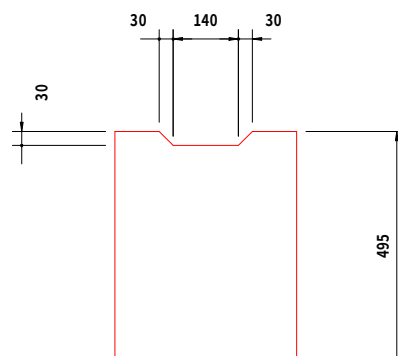


CH-1 300x500 2.0 m/本
491 kg/本

コンクリート蓋 0.5 m/枚
37 kg/枚

種 別	規格・寸法	計 算 式	数 量
県型側溝撤去	300×500		
取壊し		0.246/2.5	0.105 m ³ /m
処分	有筋Co	491/1000*(1/2)	0.246 t/m
コンクリート蓋撤去	車道用,L=500		
取壊し		0.037/2.5	0.016 m ³ /枚
処分	有筋Co		0.037 t/枚

L型側溝(一般部)撤去	単位数量計算書	1m当り
-------------	---------	------

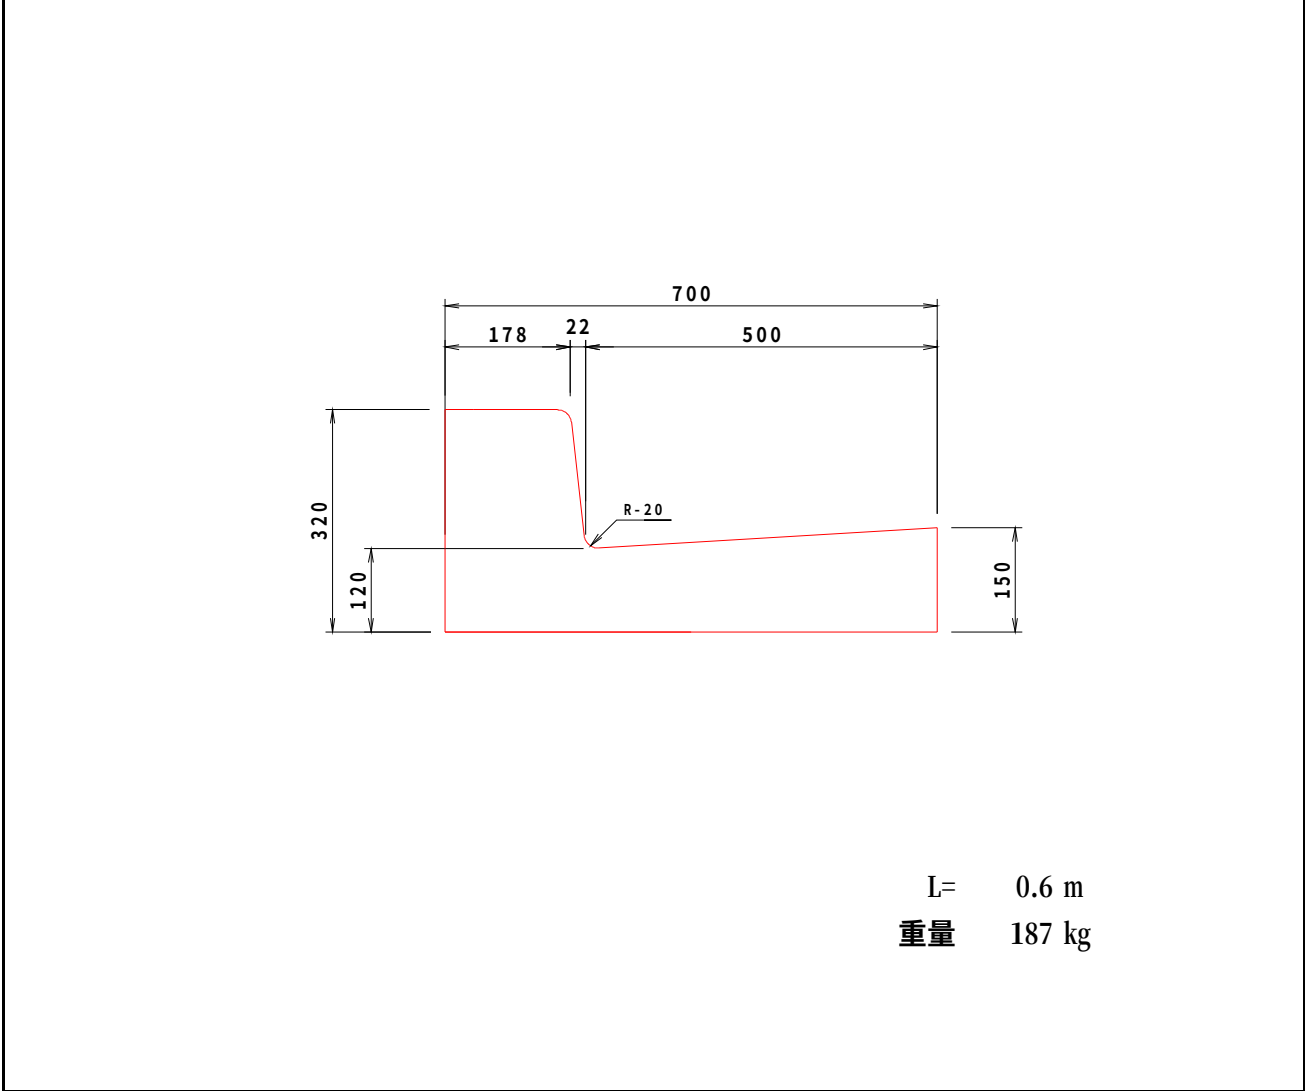[illegible][illegible]